



**Food Industry**



**Meat Processing**



**Bakeries**



**Fish Processing**



**Drinks Industry**



**Pharmaceuticals**

## FLOWFRESH - antimicrobial flooring



# WELCOME TO FLOWCRETE - for the world at your feet

Flowcrete's commitment to exceptional design, technical support and advisory services from initial enquiries through to installation is at the heart of its business philosophy.

Our global success is driven by our commitment to excellence; excellence in products, excellence in service and excellence in people.

With manufacturing plants across Europe, the Americas, Asia and Africa - and a global presence in 26 countries - we are well placed as the world's favourite specialist flooring designer and manufacturer.

Our fully trained and monitored global network of approved contractors - ensures your flooring project is in safe hands with Flowcrete.



*Dawn Gibbins MBE  
Chairman Flowcrete Group plc*

THORNTONS, DERBYSHIRE



# A FRESH APPROACH to flooring



Polygiene®  
Safer to Touch

Flowfresh represents a new generation of performance antimicrobial flooring based on the use of silver in partnership with polygiene.


The science is based on an amino compound constantly emitting ions of silver that kills bacteria which settle on the floor and continues to be active for the life time of the floor.

Silver is a natural element well known for its ability to purify and protect from bacterial infections - and provides an attractive and environmentally friendly alternative to chemically manufactured antimicrobials.

It offers total protection. A continuous migration of silver ions delivered to the contact surface from where they attack gram positive and gram negative bacteria and viruses.

The process remains active through the lifetime of the floor, even when damaged or worn, unlike coatings or surface treatments.

## Polygiene® technology - killing microbes on contact

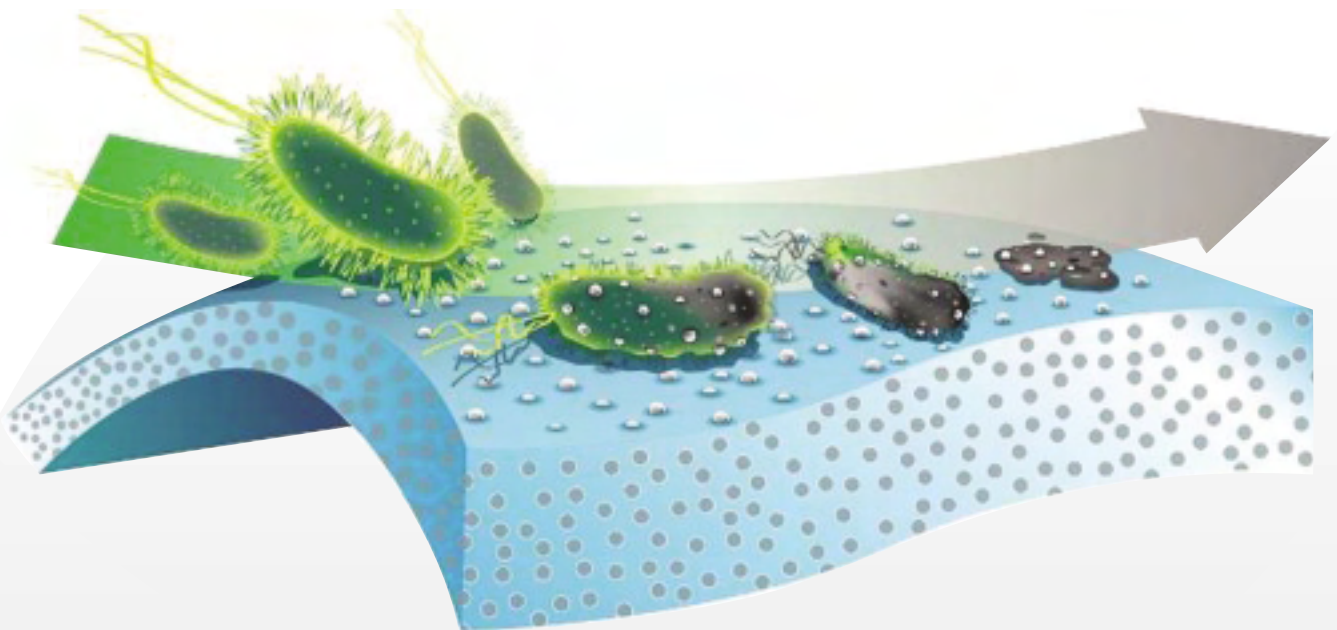

**ELECTRICAL RESISTANCE  
(ESD GRADES IN HF, MF AND TZ)**

- |                         |                          |
|-------------------------|--------------------------|
| ✓ E-coli                | ✓ Pseudomonas Aeruginosa |
| ✓ Staphylococcus Aureus | ✓ Salmonella Typhi       |
| ✓ MRSA                  | ✓ Streptococcus Pyogenes |
| ✓ Proteus Vulgaris      | ✓ Enterococcus Faecalis  |
| ✓ Listeria Weshimen     | ✓ SARS Coronousitus      |

## FLOWFRESH HF

We design and supply floors that can cope with all the rigours of the food and drink sector – and offer choice in the specification process to ensure the right solution for individual environments.

Different systems can offer the ability to withstand daily rigours such as falling bottles, wheeled traffic, food spills, chemical leaks and everything else the industry throws at it - even sugar.

For thirty years, Flowcrete floors have been installed across the sector - in meat processing areas, dairies, kitchens zones and within both wet and dry processing zones.



## SLIP RESISTANT POLYURETHANE SCREED

To further enhance their performance in strict hygiene controlled environments, Flowcrete's range of polyurethane flooring systems incorporate Polygiene® - performance silver based anti-microbial which inhibits the growth of bacteria, fungi, moulds and mildew.

When used in food or pharmaceutical applications, Flowfresh provides effective anti-bacterial and anti-fungal protection, ensuring that the floor surface remains free of bacteria between cleaning cycles.



**Polygiene®**  
Safer to Touch



### Description

Flowfresh HF is an 8mm trowel applied, heavy duty polyurethane resin screed, ideal for wet surfaces such as food preparation areas, and chemical processing plants. Complies with FeRFA category: type 8

### Benefits

- Very high chemical resistance
- Steam cleanable - non dusting, non tainting



- Incorporates Polygiene® silver based - anti microbial additive
- Anti-slip surface
- Suitable for fork lift truck traffic
- Expert installation - applied by trained and approved contractors

### Application

*Production Areas* - Heavy traffic  
Wet/spillage areas  
Strong chemicals  
Solvent stores  
Steam cleaning

## TECHNICAL DATA

### PHYSICAL PROPERTIES

Compressive Strength to BS6319 (N/mm <sup>2</sup> )	>50
Flexural Strength to BS6319 (N/mm <sup>2</sup> )	20
Tensile Strength to BS6319 (N/mm <sup>2</sup> )	10
Impact Resistance by BRE Screed Tester	<0.5mm
Temperature Resistance (°C)	
Dry	-40 to 110
Wet	105
Water absorption to Camden test TSSH008	Nil
Electrical (surface) Resistivity to BS2050	
Std Grade	N/A
ESD Grade	<1.0x10 <sup>8</sup> ohms
Abrasion Resistance by Taber (Loss per 1000 cycles in mg/1000g load).	
H22 Wheel to ASTM D4060	25mg
Coefficient of Thermal Expansion to ASTM C531	1.7x10 <sup>-5</sup> °C
Thermal Conductivity to BS874 W/m°C	1.20
Mixed Bulk Density	2.10
Adhesion to primed concrete by direct pull (N/mm <sup>2</sup> )	>1.50 cohesive concrete failure

### MICROBIAL / FUNGAL CONTROL

<b>BACTERIA</b>	
Staphylococcus aureus	✓
Ecoli	✓
Salmonella choleraesuis	✓
Listeria welshimeri	✓
<b>CONTACT INHIBITION</b>	100%

A.A.T.C.C. Test Method 147 - 1993:  
The inclusion of Polygiene® within the screed matrix of the industrial floor system ensures the permanency of this biocidal additive even in the event of excessive surface wear. Polygiene® is effective following ingestion by living bacteria, whereupon metabolic activity within the organism is arrested. Atrophy of the organism follows, when subsequent decay allows re-release of the Polygiene® additive, so ensuring replenished activity at the floor surface.

### CHEMICAL RESISTANCE SUMMARY


<i>(comprehensive list available on request)</i>	
Hydrochloric Acid 10%	✓
Sulphuric Acid 25%	✓
Citric Acid 10%	✓
Acetic Acid 5%	✓
Lactic Acid 10%	✓
Acetone	✓
Methanol	✓
Sugar Syrups	✓
Caustic Soda	✓
Petrol	✓
Oil	✓
Detergents	✓

### APPLICATION

<b>Production Areas</b>	
- Medium traffic - dry process	
- Heavy traffic - dry process	
- Wet / spillage areas	✓
- Kitchens/Pot Wash areas	✓
- Packaging areas	
<b>Warehouses</b>	
- Loading bays	
<b>Laboratories/Quality Control</b>	
Dispensaries	
Cold Stores/Freezers	
Solvent/Chemical Stores	✓
Battery Charging Areas	✓

Colours may vary due to the limitation in the printing process


## FINISHES




Ultramarine




Dark Grey




Mid Grey




Cream




Ochre



Dark Green



Mustard



Red

## COLOUR

## REFERENCE LIST

FOOD INDUSTRY	PHARMACEUTICAL INDUSTRY
Nestlé	Lever Brothers
RHM	Pfizer
Mars	Baxter Healthcare
Fisher	Bayer
Cadburys	Schering Plough
Lyons Bakery	Glaxo Smith Kline
McVities	Astra Zeneca
Fox's Biscuits	Boots
Terry Suchards	Convatec Ltd
Wrigleys	Orchard Mill
Hays Soft Drinks	Roche Pharmaceuticals
Courage	Cox Pharmaceutical
Northern Foods	Wyeth Laboratories
Bovril	Merck
Tryton Foods	
Grants	
Coca Cola	
Hazelwood Foods	
Diageo	
Dalehead Foods	

## FOR HEAVY TRAFFIC AREAS



## FLOWFRESH MF



### SELF SMOOTHING HEAVY DUTY POLYURETHANE TOPPING FOR MAXIMUM HYGIENE



#### Description

Flowfresh MF is a 4-6mm self-smoothing, heavy duty polyurethane topping with a matt finish, ideal for use in dry process, packaging and storage areas that are subject to light to medium traffic and occasional chemical spillage.

Complies with FeRFA category: type 7

#### Benefits

- Very high chemical resistance
- Easy to clean
- Matt finish
- Hygienic and safe - incorporates Polygiene® - anti microbial additive
- Excellent wear and impact resistance
- Expert installation - applied by trained and approved contractors

#### Application

- Production Areas*
- Medium traffic
  - Strong chemicals
  - Loading bays


*Warehouses  
Laboratories  
Cold Stores*



**Polygiene®**  
Safer to Touch




# FINISHES




Blue




Dark Grey




Mid Grey




Cream




Ochre



Dark Green



Mustard



Red

# COLOUR



## REFERENCE LIST

### FOOD INDUSTRY

Nestlé  
RHM  
Mars  
Fisher  
Cadburys  
Lyons Bakery  
McVities  
Fox's Biscuits  
Terry Suchards  
Wrigleys  
Hays Soft Drinks  
Courage  
Northern Foods  
Bovril  
Tryton Foods  
Grants  
Coca Cola  
Hazelwood Foods

### PHARMACEUTICAL INDUSTRY

Lever Brothers  
Pfizer  
Baxter Healthcare  
Bayer  
Schering Plough  
Glaxo Smith Kline  
Astra Zeneca  
Boots  
Convatec Ltd  
Orchard Mill  
Roche Pharmaceuticals  
Cox Pharmaceutical  
Wyeth Laboratories  
Merck



## TECHNICAL DATA

### PHYSICAL PROPERTIES

Compressive Strength to BS6319 (N/mm <sup>2</sup> )	> 50
Flexural Strength to BS6319 (N/mm <sup>2</sup> )	20
Tensile Strength to BS6319 (N/mm <sup>2</sup> )	10
Impact Resistance by BRE Screed Tester	< 0.5mm
Temperature Resistance (°C)	
Dry	-20 to 80
Wet	60 max
Water absorption to Camden test TSSH008	Nil
Surface Resistivity to BS2050	
Std Grade	N/A
ESD Grade	< 1.0x10 <sup>8</sup> ohms
Abrasion Resistance by Taber (Loss per 1000 cycles in mg/1000g load). H22 Wheel to ASTM D4060	30mg
Coefficient of Thermal Expansion to ASTM C531	1.4x10 <sup>-5</sup> °C
Thermal Conductivity to BS874 W/m°C	0.85
Mixed Bulk Density	1.95
Adhesion to primed concrete by direct pull (N/mm <sup>2</sup> )	> 1.50 cohesive concrete failure

### MICROBIAL / FUNGAL CONTROL

<b>BACTERIA</b>	
Staphylococcus aureus	✓
Ecoli	✓
Salmonella choleraesuis	✓
Listeria welshimeri	✓
<b>CONTACT INHIBITION</b>	100%

A.A.T.C.C. Test Method 147 - 1993:  
The inclusion of Polygiene® within the screed matrix of the industrial floor system ensures the permanency of this biocidal additive even in the event of excessive surface wear. Polygiene® is effective following ingestion by living bacteria, whereupon metabolic activity within the organism is arrested. Atrophy of the organism follows, when subsequent decay allows re-release of the Polygiene® additive, so ensuring replenished activity at the floor surface.

### CHEMICAL RESISTANCE SUMMARY

<i>(comprehensive list available on request)</i>	
Hydrochloric Acid 10%	✓
Sulphuric Acid 25%	✓
Citric Acid 10%	✓
Acetic Acid 5%	✓
Lactic Acid 10%	✓
Acetone	✓
Methanol	✓
Sugar Syrups	✓
Caustic Soda	✓
Petrol	✓
Oil	✓
Detergents	✓

### APPLICATION

<b>Production Areas</b>	
- Medium traffic - dry process	✓
- Heavy traffic - dry process	
- Wet /spillage areas	
- Kitchens/Pot Wash areas	
- Packaging areas	✓
<b>Warehouses</b>	
- Loading bays	✓
Laboratories/Quality Control	✓
Dispensaries	✓
Cold Stores/Freezers 4	
Solvent/Chemical Stores	
Battery Charging Areas	

Colours may vary due to the limitation in the printing process

## FLOWFRESH SRQ



### Description

Flowfresh SRQ is a 5 - 6mm heavy duty, chemical resistant antimicrobial treated polyurethane resin floor screed system, with an attractive and positively textured, coloured quartz floor finish. Ideal for wet processing zones such as food manufacturing, food preparation areas, and chemical processing plants.

### Benefits

- Hygienic and safe - incorporates Polygiene® - an anti microbial additive based on silver ion technology
- Very high chemical resistance
- Attractive decorative terrazzo finish
- Easy to clean
- High temperature resistance
- Expert rapid installation - applied by trained and approved contractors
- Non-tainting, non-dusting  
High Abrasion Resistance, withstands mechanical stress  
Good alternative to expensive acid resistant tiles  
Low odour during application  
Positive slip resistance

## HEAVY DUTY POLYURETHANE FOR MAXIMUM CLEANABILITY AND HYGIENE




### Application

- Production Areas* - Heavy traffic  
- Aesthetic requirements  
- Strong Chemicals  
- Wet processing



**Polygiene®**  
Safer to Touch

**FINISHES**

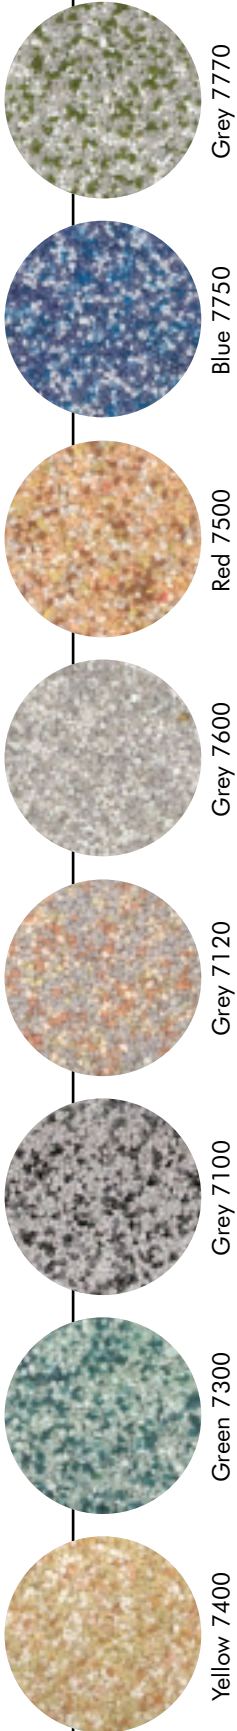

Grey 7770

Blue 7750

Red 7500

Grey 7600

Grey 7120

Grey 7100

Green 7300

Yellow 7400

**COLOUR**



**REFERENCE LIST**

**PHARMACEUTICAL INDUSTRY**

- Lever Brothers
- Pfizer
- Baxter Healthcare
- Bayer
- Schering Plough
- Glaxo Smith Kline
- Astra Zeneca
- Boots
- Convatec Ltd
- Orchard Mill
- Roche Pharmaceuticals
- Cox Pharmaceutical
- Wyeth Laboratories

**FOOD INDUSTRY**

- KP Nuts
- Kellogs
- Sun Valley Foods
- Bernard Matthews
- Boddingtons
- Britvik
- Kraft Foods
- Nestlé
- Hells Kitchen



**TECHNICAL DATA**

**PHYSICAL PROPERTIES**

Compressive Strength to BS6319 (N/mm <sup>2</sup> )	> 50
Flexural Strength to BS6319 (N/mm <sup>2</sup> )	20
Tensile Strength to BS6319 (N/mm <sup>2</sup> )	10
Impact Resistance by BRE Screed Tester	< 0.5mm
Temperature Resistance (°C)	
Dry	
Wet	
Water absorption to Camden test TSSH008	
Surface Resistivity to BS2050	
Std Grade	N/A
Abrasion Resistance by Taber (Loss per 1000 cycles in mg/1000g load).	
H22 Wheel to ASTM D4060	25mg
Coefficient of Thermal Expansion to ASTM C531	
Thermal Conductivity to BS874 W/m°C	
Mixed Bulk Density	
Adhesion to primed concrete by direct pull (N/mm <sup>2</sup> )	> 1.50 cohesive concrete failure

**MICROBIAL / FUNGAL RESISTANCE**

<b>BACTERIA</b>	
Staphylococcus aureus	✓
Escherichia coli	✓
Salmonella choleraesuis	✓
Listeria welshimeri	✓
<b>CONTACT INHIBITION</b>	100%

A.A.T.C.C. Test Method 147 - 1993:  
 The inclusion of Polygiene® within the screed matrix of the industrial floor system ensures the permanency of this biocidal additive even in the event of excessive surface wear. Polygiene® is effective following ingestion by living bacteria, whereupon metabolic activity within the organism is arrested. Atrophy of the organism follows, when subsequent decay allows re-release of the Polygiene® additive, so ensuring replenished activity at the floor surface.

**CHEMICAL RESISTANCE SUMMARY**

<i>(comprehensive list available on request)</i>	
Hydrochloric Acid 10%	✓
Sulphuric Acid 50%	✓
Citric Acid 30%	✓
Acetic Acid 5%	✓
Lactic Acid 10%	✓
Acetone	✓
Methanol	✓
Sugar Syrups	✓
Caustic Soda	✓
Petrol	✓
Oil	✓
Detergents	✓

**APPLICATION**

<b>Production Areas</b>	
- Medium traffic - dry process	
- Heavy traffic - dry process	✓
- Wet / spillage areas	✓
- Kitchens/Pot Wash areas	✓
- Packaging areas	
<b>Warehouses</b>	
- Loading bays	
Laboratories/Quality Control	
Dispensaries	✓
Cold Stores/Freezers	
Solvent/Chemical Stores	
Battery Charging Areas	

# MONDÉCO TZ



## Description

Mondéco TZ is a high temperature resistant, steam cleanable 8mm polyurethane terrazzo finish, ideal for pharmaceutical, food and chemical process areas, where the floor area is subjected to hot fluid spillage, steam cleaning, heavy traffic, impact and chemical attack.

## Benefits

- Hygienic and safe - incorporates Polygiene® - the anti microbial additive
- Very high chemical resistance
- Attractive decorative terrazzo finish
- Easy to clean
- High temperature resistance
- Expert installation - applied by trained and approved contractors
- Antistatic grade available for dry powder processing areas

## HEAVY DUTY POLYURETHANE TERRAZZO FOR MAXIMUM CLEANABILITY AND HYGIENE

## Application

*Production Areas* - Heavy traffic  
- Aesthetic requirements  
- Strong chemicals

*Laboratories*  
*Clean rooms*  
*Tablet production*



## REFERENCE LIST


### PHARMACEUTICAL INDUSTRY

Lever Brothers	Boots
Pfizer	Convatec Ltd
Baxter Healthcare	Bayer
Astra Zeneca	Roche Pharmaceuticals
Schering Plough	Cox Pharmaceutical
Glaxo Smith Kline	Wyeth Laboratories
Merck	




**Polygiene®**  
Safer to Touch


# FINISHES




Pomegranate




Cherry




Hazelnut



Mango



Avocado



Almond

# COLOUR

## FOOD INDUSTRY

Nestlé	RHM
Courage	Mars
Northern Foods	Bovril
Cadburys	Tryton Foods
Lyons Bakery	Grants
McVities	Coca Cola
Fox's Biscuits	Hazelwood Foods
Terry Suchards	
Wrigleys	

## TECHNICAL DATA

### PHYSICAL PROPERTIES

Compressive Strength to BS6319 (N/mm <sup>2</sup> )	>55
Flexural Strength to BS6319 (N/mm <sup>2</sup> )	>20
Tensile Strength to BS6319 (N/mm <sup>2</sup> )	8
Impact Resistance by BRE Screed Tester	<0.5mm
Temperature Resistance (°C)	
Dry	-40 to 120
Wet	105 max
Water absorption to Camden test TSSH008	Nil
Surface Resistivity to BS2050	
Std Grade	N/A
A/S Grade	<1.0x10 <sup>9</sup> ohms
Abrasion Resistance by Taber (Loss per 1000 cycles in mg/1000g load).	
H22 Wheel to ASTM D4060	25mg
Coefficient of Thermal Expansion to ASTM C531	1.7x10 <sup>-5</sup> °C
Thermal Conductivity to BS874 W/m°C	1.20
Mixed Bulk Density	2.10
Adhesion to primed concrete by direct pull (N/mm <sup>2</sup> )	>1.50 cohesive concrete failure

### MICROBIAL / FUNGAL RESISTANCE

<b>BACTERIA</b>	
Staphylococcus aureus	✓
Escherichia coli	✓
Salmonella choleraesuis	✓
Listeria welshimeri	✓
<b>CONTACT INHIBITION</b>	100%

A.A.T.C.C. Test Method 147 - 1993:  
The inclusion of Polygiene® within the screed matrix of the industrial floor system ensures the permanency of this biocidal additive even in the event of excessive surface wear. Polygiene® is effective following ingestion by living bacteria, whereupon metabolic activity within the organism is arrested. Atrophy of the organism follows, when subsequent decay allows re-release of the Polygiene® additive, so ensuring replenished activity at the floor surface.

### CHEMICAL RESISTANCE SUMMARY

(comprehensive list available on request)

Hydrochloric Acid 10%	✓
Sulphuric Acid 50%	✓
Citric Acid 30%	✓
Acetic Acid 5%	✓
Lactic Acid 10%	✓
Acetone	✓
Methanol	✓
Sugar Syrups	✓
Caustic Soda	✓
Petrol	✓
Oil	✓
Detergents	✓


### APPLICATION

<b>Production Areas</b>	
- Medium traffic - dry process	✓
- Heavy traffic - dry process	✓
- Clean rooms	✓
<b>- Wet /spillage areas</b>	
- Kitchens/Pot Wash areas	
- Packaging areas	
<b>Warehouses</b>	
- Loading bays	
Laboratories/Quality Control	✓
Dispensaries	✓
Cold Stores/Freezers	
Solvent/Chemical Stores	
Battery Charging Areas	


Colours may vary due to the limitation in the printing process

## TYPICAL DETAILS


### Typical (induced) movement joint

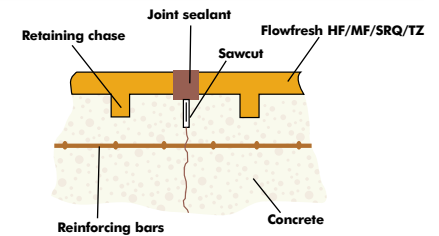


### Typical (expansion) movement joint

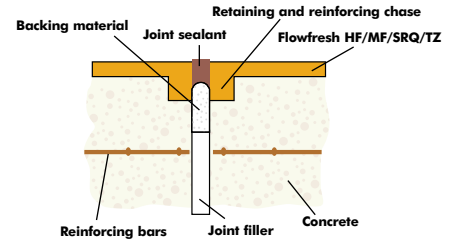

### Typical floor to wall detail

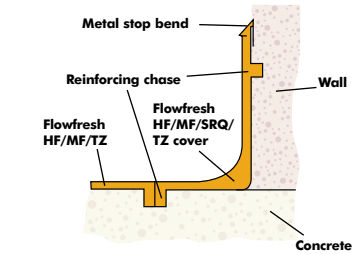

### Typical drainage channel arrangement

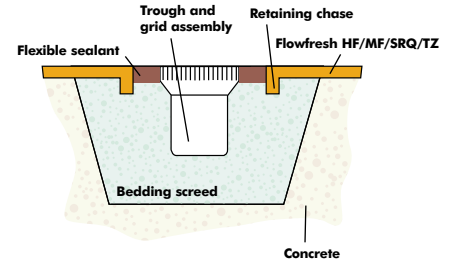

## SUCCESSFUL PROJECTS

"We had the utmost faith and confidence that Flowcrete could meet our needs. Our confidence was justified with a floor which underpins our own quality culture."

**Bob Wakefield, Project Engineer, McVities**

"We knew of the reputation of Flowcrete and relied heavily on their knowledge and the fact that they have an approved network of contractors."

**Tim Stafford, Project Manager Tryton Foods**

"Although the original floor met with all the relevant food act regulations, it hadn't been updated for 15 years. Flooring for the food industry had seen many new products, and we wanted to pick up on this and improve health and hygiene in the production areas Flowcrete was the ideal choice for us and the finished floor has not only bought us up to date, it looks great too."

**Mr. Lrn, Owner, Cleone Foods**

"By using different colours on the floor, we've been able to create very distinct easily understandable demarcation zones. The floor looks really good and we are very pleased with the result."

**Theo Gavriel, Owner, Theo's**



## Flowcrete around the world

<b>Argentina</b>	Flowcrete Argentina	<b>Tel:</b> +54 11 4621 2991	<b>Fax:</b> +54 11 4481 1422	<b>Email:</b> argentina@flowcrete.com
<b>Australia</b>	Flowcrete Australia	<b>Tel:</b> +61 2 9651 4742	<b>Fax:</b> +61 2 9651 4742	<b>Email:</b> australia@flowcrete.com
<b>Belgium</b>	Flowcrete Corrosion Protection	<b>Tel:</b> +32 1575 6927	<b>Fax:</b> +32 1575 2894	<b>Email:</b> belgium@flowcrete.com
<b>Brazil</b>	Flowcrete South America	<b>Tel:</b> +55 11 3675 1873	<b>Fax:</b> +55 11 3675 1873	<b>Email:</b> brazil@flowcrete.com
<b>China</b>	Flowcrete Shanghai Ltd	<b>Tel:</b> +86 21 6236 0984	<b>Fax:</b> +86 21 6236 0476	<b>Email:</b> china@flowcrete.com
<b>Czech Republic</b>	Flowcrete Czech c/o Techfloor	<b>Tel:</b> +420 553 791 311	<b>Fax:</b> +420 553 791 311	<b>Email:</b> czechrep@flowcrete.com
<b>Denmark</b>	Flowcrete Denmark	<b>Tel:</b> +45 3053 1294	<b>Fax:</b> +45 6440 0039	<b>Email:</b> denmark@flowcrete.com
<b>Estonia</b>	Flowcrete Estonia	<b>Tel:</b> +371 864 4666	<b>Fax:</b> +371 7541 241	<b>Email:</b> baltic@flowcrete.com
<b>France</b>	Flowcrete France c/o Solve	<b>Tel:</b> +33 344 58 89 76	<b>Fax:</b> +33 344 58 73 86	<b>Email:</b> france@flowcrete.com
<b>Germany</b>	Flowcrete Germany	<b>Tel:</b> +49 3466 364 370	<b>Fax:</b> +49 3466 364 371	<b>Email:</b> germany@flowcrete.com
<b>Hong Kong</b>	Flowcrete (Hong Kong) Ltd	<b>Tel:</b> +852 2795 0478	<b>Fax:</b> +852 2795 4842	<b>Email:</b> hongkong@flowcrete.com
<b>South Korea</b>	Flowcrete Korea	<b>Tel:</b> +822 333 5613	<b>Fax:</b> +822 326 1925	<b>Email:</b> southkorea@flowcrete.com
<b>Latvia</b>	Flowcrete Baltics	<b>Tel:</b> +371 8644666	<b>Fax:</b> +371 7541241	<b>Email:</b> baltic@flowcrete.com
<b>Malaysia</b>	Flowcrete Asia Sdn Bhd	<b>Tel:</b> +60 3 6277 9575	<b>Fax:</b> +60 3 6277 4645	<b>Email:</b> malaysia@flowcrete.com
<b>New Zealand</b>	Flowcrete New Zealand	<b>Tel:</b> +649 817 2739	<b>Fax:</b> +649 817 2749	<b>Email:</b> newzealand@flowcrete.com
<b>Norway</b>	Flowcrete Norway AS	<b>Tel:</b> +47 6486 0830	<b>Fax:</b> +47 6486 0831	<b>Email:</b> norway@flowcrete.com
<b>Poland</b>	Flowcrete Polska Sp. z.o.o.	<b>Tel:</b> +48 22 879 8907	<b>Fax:</b> +48 22 879 8918	<b>Email:</b> poland@flowcrete.com
<b>Singapore</b>	Flowcrete Singapore Pte Ltd	<b>Tel:</b> +65 6482 3133	<b>Fax:</b> +65 6482 5225	<b>Email:</b> singapore@flowcrete.com
<b>South Africa</b>	Flowcrete SA (Pty) Ltd	<b>Tel:</b> +27 31 461 3411	<b>Fax:</b> +27 31 461 3475	<b>Email:</b> southafrica@flowcrete.com
<b>Sweden</b>	Flowcrete Sweden AB	<b>Tel:</b> +46 435 38630	<b>Fax:</b> +46 435 31498	<b>Email:</b> sweden@flowcrete.com
<b>Switzerland</b>	Flowcrete Switzerland	<b>Tel:</b> +41 41 709 00 12	<b>Fax:</b> +41 41 709 00 13	<b>Email:</b> switzerland@flowcrete.com
<b>Thailand</b>	Flowcrete Thailand	<b>Tel:</b> +66 2 693 0775	<b>Fax:</b> +66 2 694 3295	<b>Email:</b> thailand@flowcrete.com
<b>UAE</b>	Flowcrete Middle East FZCO	<b>Tel:</b> +971 4 881 1016	<b>Fax:</b> +971 4 881 2726	<b>Email:</b> uae@flowcrete.com
<b>UK</b>	Flowcrete UK Ltd	<b>Tel:</b> +44 (0)1270 753 000	<b>Fax:</b> +44 (0)1270 753 333	<b>Email:</b> uk@flowcrete.com
<b>USA</b>	Flowcrete North America Inc.	<b>Tel:</b> +1 936 539 6700	<b>Fax:</b> +1 936 539 6701	<b>Email:</b> usa@flowcrete.com